

11-06-00

PTO/SB/05 MODIFIED BY AT&T CORP.

UTILITY

Attorney Docket No.

2000-054

Total Pages

36

PATENT APPLICATION
TRANSMITTAL

First Named Inventor or Application Identifier

Adam Louis Buchsbaum et al.

Express Mail Label No.

EL424649153US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

1. ☒ Fee Transmittal Form
(submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 19]
(preferred arrangement set forth below)
 - Descriptive title of invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings(if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
- ☒ Drawing(s)(35 USC 113) [Total Sheets 10]
- Oath or Declaration [Total Pages 4]
 - ☐ Newly executed (original or copy (Unsigned))
 - ☐ Copy from a prior application(37 CFR 1.63(d))
(for continuation/divisional with Box 15 completed)
[Note Box 15 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b)

5. ☐ Microfiche Computer Program (Appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy(identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers(cover sheet & document(s))
8. ☐ 37 CFR 3.73(b)Statement ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure ☐ Copies of IDS
Statement(IDS)/PTO-1449 Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
14. ☐ Other :

If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No:

for application information: Examiner:

Group/Art Unit:

CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under 37 CFR 1.154, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

16. CORRESPONDENCE ADDRESS


☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME	Samuel H. Dworesky				
ADDRESS	AT&T CORP. P.O. Box 4110				
CITY	Middletown	STATE	New Jersey	ZIP CODE	07748-4110
COUNTRY	United States of America			FAX	732-368-6932

17. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Cedric G DeLaCruz	Reg. #	36498
TELEPHONE	908-221-5430		
SIGNATURE		DATE	11/03/2000

"Express Mail" Mailing Label Number EL424649153US

Date of Deposit 11/03/2000

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington D.C. , 20231

Shawn Mc Gee

(Printed Name of Person Mailing Paper)

(Signature of Person Mailing Paper)

FEE TRANSMITTAL

Patent Fees are subject to annual revision

Complete Known

Application Number

Filing Date

First Named Inventor

Adam Louis Buchsbaum et al.

Examiner Name

Group/Art Unit

Attorney Docket No.

2000-0542

TOTAL AMOUNT
OF PAYMENT

\$790

METHOD OF PAYMENT (check one)

1. The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to.

Deposit Account

Number

01-2745

Deposit Account

Name

AT&T CORP.

Charge Any Additional Fee
Required Under 37 CFR 1.16
and 1.17Charge the Issue Fee Set in 37
CFR 1.18 at the Mailing Date
of the Notice of Allowance**FEE CALCULATION****1. FILING FEE**

Large Fee Code	Entity Fee(\$)	Fee Description	Fee Paid
101	710	Utility(37CFR 1.53(b)) / CPA(37CFR 1.53(d)) Filing Fee	710
106	320	Design Filing Fee	
108	710	Reissue Filing Fee	
114	150	Provisional Filing Fee	

SUBTOTAL (1) 710**CLAIMS**☐ Filing Under 37CFR 1.53 (b)☐ CPA Under 37CFR 1.53 (d)☐ Amendment

Extra Claims

Fee from below

Fee Paid

1	20	-	20=	0	x	18	=	0
4	-	3=		1	x	80	=	80
							=	0

Multiple Dependent Claims

Large Fee Code	Entity Fee(\$)	Fee Description
103	18	Claims in excess of 20
102	80	Independent Claims in excess of 3
104	270	Multiple Dependent Claims
109	80	Reissue independent claims over original patent
110	18	Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) 80**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Fee Code	Entity Fee(\$)	Fee Description	Fee Paid
105	130	Surcharge - late filing fee or oath	
127	50	Surcharge - late provisional filing fee or cover sheet	
139	130	Non-English specification	
147	2520	For filing a request for reexamination	
112*	920	Requesting publication of SIR prior to Examiner action	
113*	1840	Requesting publication of SIR after Examiner action	
115	110	Extension for reply within first month	
116	390	Extension for reply within second month	
117	890	Extension for reply within third month	
118	1390	Extension for reply within fourth month	
128	1890	Extension for reply within fifth month	
119	310	Notice of Appeal	
120	310	Filing a brief in support of an appeal	
121	270	Request for oral hearing	
138	1510	Petition to institute a public use proceeding	
140	110	Petition to revive - unavoidable	
141	1240	Petition to revive - unintentional	
142	1240	Utility issue fee (or reissue)	
143	440	Design issue fee	
122	130	Petitions to the Commissioner	
123	50	Petitions related to provisional applications	
126	240	Submission of Information Disclosure Statement	
581	40	Recording each patent assignment per property (times number of properties)	
146	710	Filing a submission after final rejection(37 CFR 1.129(a))	
149	710	For each additional invention to be examined (37 CFR 1.129(b))	

Other fee (specify)

Other fee (specify)

* Reduced by Basic
Filing Fee Paid**SUBTOTAL(3)** 0**SUBMITTED BY**Typed or
Printed Name

Cedric G DeLaCruz

Complete (if applicable)

Reg.
Number

36498

Signature

Date

11/03/2000

Deposit Account User ID

METHOD FOR FAST NETWORK-AWARE CLUSTERING

5 This application is a continuation-in-part of U.S. Patent Application No 09/603,154 filed on July 23, 2000 which claims the benefit of United States provisional application No. 60/151,194, filed on August 27, 1999, the contents and disclosure of which are fully incorporated herein by reference.

This application also claims the benefit of United States provisional application
10 No. 60/215,302, filed on June 30, 2000 and United States provisional application No. 60/234,511, filed on September 22, 2000, the contents and disclosure of which are fully incorporated herein by reference.

BACKGROUND OF THE INVENTION

This invention relates to a method of grouping or clustering clients, servers and/or other entities within a network to optimize and expedite the flow, transfer, redirection and/or redistribution of data and information within the network and more particularly, to a method for fast network aware or on-line clustering which uses a radix-encoded trie process to perform
20 longest prefix matching on one or more client and/or server network IP addresses in order to properly cluster the clients and/or server into proper clusters.

Servers, such as proxy servers, cache servers, content distribution servers, mirror servers and other related servers are typically used to speed the access of data and reduce response time
25 for network client requests in a network, such as the World Wide Web. Generally, these network clients issue requests for information, such as in the form of a Hypertext Transfer Protocol (HTTP) requests for some information, such as one or more Web pages. These requests are then handled directly or indirectly by these servers, such as proxy servers, caches servers, content distribution servers and mirror servers, to hopefully expedite the accessing and transfer of the
30 requested information.

Generally, these servers either act as intermediaries or as transfer or redirection points for client requests in the network. For example, in operation, a proxy server receives a request for

an Internet service (such as a Web page request) from a user. If the request passes filtering requirements, the proxy server looks in its local cache of previously downloaded Web pages. If the server finds the page, the page is returned to the user without needing to forward the request to, for example, a World Wide Web server on the Internet. If the page is not in the cache, the proxy server, acting as a client on behalf of the user, requests the page from the server out on the Internet. When the page is returned, the proxy server relates it to the original request and forwards it on to the client user.

Strategically designing placement of proxies in the network can benefit greatly from clustering network client users who are from the same network together so that the proxy server can adequately and efficiently serve these respective client clusters. Mis-characterizing clients as being in the same network may result in a proxy server being placed such that it impracticably and inefficiently serves these clients resulting in degraded performance in the network.

In the case of, for example, a cache or a content distribution server, the user's HTTP request at an originating server is typically re-routed away from the originating server and on to a cache server "closer" to the user. Generally, the cache server determines what content in the request exists in the cache, serves that content, and retrieves any non-cached content from the originating server. Any new content may also be cached locally in the cache server.

Similar to the strategic placement of proxies, the placement of cache servers, content distribution "boxes" or servers and related mirror servers can be best made by accurately clustering clients together in the network. Performance in the network may thus be improved by accurately and properly clustering multiple network clients together in related client clusters. The servers, whether they are cache servers, content distribution servers and/or mirror servers can then efficiently service these client clusters.

Knowledge of these network clusters, such as identifying certain "busy" clusters from which a certain level of network traffic originates can be used in a variety of different applications. For example, a busy Web site may want to provide tailored responses and/or Quality of Service differentiation based on the origin of requests to the Web site. Web sites

5

10

[illegible]

SUMMARY OF THE INVENTION

The present invention is a method for guiding placement of servers, such as proxy servers, cache servers, content distribution servers and mirror servers within a distributed information network. The method uses information from at least one network log, such as a server log or proxy log, and at least one network routing table to arrange clients into related client clusters. In one embodiment, the method includes the steps of generating a unified prefix/netmask table from a plurality of extracted prefix/netmask entries, extracting a plurality of client IP addresses from the at least one network log, comparing each of the plurality of client IP addresses with entries in the unified/prefix netmask table to determine a common longest prefix matching between each of the plurality of client IP addresses and the entries in the unified/prefix netmask table and grouping all of the client IP addresses which share the common longest prefix matching into at least one client cluster. Each client within a client cluster will share a common network address prefix from the unified routing table with the other clients in the same client cluster.

Preferably, a number of different routing table snapshots are used in extracting entries for the unified prefix/netmask table. These multiple entries from the different prefix/netmask tables are unified into a singular format and then merged into a single table.

Network servers, such as proxy servers, cache servers, content distribution servers and mirror servers may be assigned to one or more clusters based on a number of factors such as the number of clients within the cluster, the number of requests issued, the URLs accessed and the number of bytes fetched from a server, such as a Web server.

The present invention is also a method for on-line network-aware clustering. In one embodiment, on-line network aware clustering includes extracting client IP addresses, performing longest prefix matching on each client IP address and classifying all the client IP address that have the same longest matched prefix into a client cluster, wherein the longest prefix matching is performed in accordance with a radix-encoded trie process. In other embodiments, the on-line network aware clustering may be performed to detect server clusters, instead of client

5

項目	2000年	2001年	2002年	2003年	2004年	2005年	2006年	2007年	2008年	2009年	2010年	2011年	2012年	2013年	2014年	2015年	2016年	2017年	2018年	2019年	2020年
1. 総人口	12,800,000	12,900,000	13,000,000	13,100,000	13,200,000	13,300,000	13,400,000	13,500,000	13,600,000	13,700,000	13,800,000	13,900,000	14,000,000	14,100,000	14,200,000	14,300,000	14,400,000	14,500,000	14,600,000	14,700,000	14,800,000
2. 男性人口	6,400,000	6,450,000	6,500,000	6,550,000	6,600,000	6,650,000	6,700,000	6,750,000	6,800,000	6,850,000	6,900,000	6,950,000	7,000,000	7,050,000	7,100,000	7,150,000	7,200,000	7,250,000	7,300,000	7,350,000	
3. 女性人口	6,400,000	6,450,000	6,500,000	6,550,000	6,600,000	6,650,000	6,700,000	6,750,000	6,800,000	6,850,000	6,900,000	6,950,000	7,000,000	7,050,000	7,100,000	7,150,000	7,200,000	7,250,000	7,300,000	7,350,000	
4. 出生人口	1,200,000	1,150,000	1,100,000	1,050,000	1,000,000	950,000	900,000	850,000	800,000	750,000	700,000	650,000	600,000	550,000	500,000	450,000	400,000	350,000	300,000	250,000	
5. 死亡人口	800,000	850,000	900,000	950,000	1,000,000	1,050,000	1,100,000	1,150,000	1,200,000	1,250,000	1,300,000	1,350,000	1,400,000	1,450,000	1,500,000	1,550,000	1,600,000	1,650,000	1,700,000	1,750,000	
6. 出生率	9.4	8.9	8.5	8.0	7.7	7.3	6.8	6.3	5.9	5.5	5.1	4.7	4.3	3.9	3.5	3.1	2.8	2.4	2.1	1.7	
7. 死亡率	6.3	6.6	6.9	7.3	7.7	8.0	8.3	8.6	8.9	9.2	9.5	9.8	10.1	10.4	10.7	11.0	11.3	11.6	11.9	12.2	
8. 自然増減	400,000	300,000	200,000	100,000	0	-100,000	-200,000	-300,000	-400,000	-500,000	-600,000	-700,000	-800,000	-900,000	-1,000,000	-1,100,000	-1,200,000	-1,300,000	-1,400,000	-1,500,000	
9. 人口密度	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	
10. 平均年齢	25.5	26.0	26.5	27.0	27.5	28.0	28.5	29.0	29.5	30.0	30.5	31.0	31.5	32.0	32.5	33.0	33.5	34.0	34.5	35.0	
11. 出生率(15-64歳)	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.3	0.2	0.1	0.0	-0.1	-0.2	-0.3	-0.4	-0.5	-0.6	-0.7	
12. 死亡率(15-64歳)	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	
13. 自然増減(15-64歳)	0.4	0.0	-0.1	-0.2	-0.4	-0.6	-0.8	-1.0	-1.2	-1.4	-1.6	-1.8	-2.0	-2.2	-2.4	-2.6	-2.8	-3.0	-3.2	-3.4	
14. 人口密度(15-64歳)	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	
15. 平均年齢(15-64歳)	25.5	26.0	26.5	27.0	27.5	28.0	28.5	29.0	29.5	30.0	30.5	31.0	31.5	32.0	32.5	33.0	33.5	34.0	34.5	35.0	

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an exemplary network configuration in accordance with the teachings of the present invention.

5

FIG. 2 illustrates an exemplary method in accordance with the teachings of the present invention.

FIG. 3 illustrates an exemplary routing table containing routing information.

10

FIG. 4 illustrates an exemplary method for creating a unified routing table in accordance with the teachings of the present invention.

FIG. 5 illustrates an exemplary table containing routing information and unified routing information.

FIG. 6 illustrates an exemplary method for clustering clients in accordance with the teachings of the present invention.

FIG. 7 illustrates an exemplary method for network aware clustering in accordance with the teachings of the present invention.

FIG. 8 illustrates an exemplary radix encoded trie structure in accordance with the teachings of the present invention.

25

FIG. 9a illustrates an exemplary code implementation of a radix encoded trie in accordance with the teachings of the present invention.

FIG. 9b illustrates another exemplary code implementation of a radix encoded trie in accordance with the teachings of the present invention.

30

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a method for clustering clients and allocating servers, such as proxy servers, cache servers, content distribution servers and mirror servers, to those client clusters in a distributed information network, such as the World Wide Web. The present invention also relates to a method for clustering clients and servers in a distributed information network to aid in engineering and shaping traffic within the network, such as may be done in, for example, a content distribution application. The present invention includes methods for both off-line and on-line or fast network aware clustering of both clients and servers within the network, on-line clustering methods preferably performed according to a radix-encoded trie or trie as discussed in more detail later herein.

Referring to FIG. 1, an exemplary network 10 configured in accordance with the teachings of the present invention is shown. The network 10 includes a number of clients, such as clients 20 (C1, C2....Cn) which are clustered together in a client cluster 30, clients 40 (CA1, CA2, CA3CAN) which are clustered together in a client cluster 50 and clients 60 (CB1, CB2....CBn) which are clustered together in a client cluster 70. Client cluster 30 is in communication with servers 32, 34 which together form a server cluster 36, client cluster 50 is in communication with servers 52, 54 and 56 which form a server cluster 58 and client cluster 70 is in communication with a single server 72. In the present invention, servers 32, 34, 52, 54, 56 and 72 may be any one of proxy servers, cache servers, content distribution servers and/or mirror servers. For example, server 32 and server 34 may be proxy servers such that server cluster 36 is a proxy server cluster.

Server cluster 36 including servers 32 and 34, server cluster 58 including servers 54, 56 and 58 and server 72 are in further communication with a server, such as a World Wide Web server 90. World Wide Web server may be any server available on the Internet which is responsive to requests to and from any one of the clients and/or servers. For example, World Wide Web server may be a server which receives and responds to requests for Web pages related to one or more Web sites which are resident on the server. Other network configurations are possible provided the network servers, such as the network proxy servers, cache servers, content

distribution servers and mirror servers are allocated to properly clustered client clusters as discussed in more detail later herein.

In the present invention, the placement and configuration of the servers and server clusters, such as the proxy servers and related proxy server clusters, cache servers and related cache server clusters, content distribution servers and content distribution server clusters and mirror servers and related mirror server clusters depends on the clustering of clients within the network. For example, using a content caching scheme for illustrative purposes, a client may issue a request for content, such as HTTP request to a World Wide Web server. This may be performed by the Web client clicking on a URL that is "content-delivery enabled", i.e. the URL includes the use of a special routing code that redirects the Web page request to the optimum or "closest" server. This "content-delivery enabled" URL will re-route that client's request away from the site's originating Web server and on to a cache server or cache server cluster, that is better suited to serve the client.

Referring to FIG. 2, an exemplary embodiment of a method for clustering clients and assigning or allocating servers to these client clusters is shown. In this embodiment, a unified routing information table is created, step 110. The unified routing information table, preferably includes routing information from one or more routing tables, such as network routing prefix and netmask information. For background purposes, a netmask is a series of bits designed to "mask" or conceal certain portions of an IP address. Typically, the standard netmask for a class C network like is 255.255.255.0 where the "255.255.255" prefix portion identifies the network number and the last octet, ".0", is the actual machine number or subnetwork number. Referring again to FIG. 2, clients within the network are classified into client clusters based on information from the unified routing information table, step 120. Servers, such as proxy servers, cache servers, network distribution servers and mirror servers may then be assigned to these client clusters, step 130, as discussed in more detail later herein.

As shown in FIG. 2, the present invention utilizes routing table information from, preferably, two or more routing tables to create a unified routing information table. For background purposes, a router is a device or, in some cases, software in a computer, that

determines the next network point to which a packet should be forwarded toward its destination. The router decides which way to send each information packet based on its current understanding of the state of the networks it is connected to. Typically, routers create or maintain a routing table of the available routes and their conditions and uses this information along with distance and cost algorithms to determine the best route for a given packet. An exemplary routing table or routing table "snapshot" 160 is shown in FIG. 3. As shown, the routing table or routing table snapshot 160 may include information such network prefix and netmask information 170, network identification information 180 and AS path information 190. Other additional information such as next hop IP address and AS number, etc may also be available via the network routing table. In an exemplary embodiment, as discussed above, information from a plurality of routing tables are used to create the unified routing table for use in clustering clients together.

Referring to FIG. 4, an exemplary method for creating a unified routing table is shown. To create the unified table, a number of prefix/netmask entries are extracted from a number of routing tables or routing table snapshots, step 200. Although only a single routing table or routing table snapshot may be used, preferably two or more routing tables or routing table snapshots are used since any one table is unlikely to contain the desired information on all the necessary prefix/netmask entries. Each router in a network such as the World Wide Web will typically only see a limited set of traffic, thereby it is desirable to use a multiplicity of different routing tables from different routers in order to obtain a more complete set of routing information. The prefix/netmask entries from the various tables are unified into a single standardized format, step 210, as discussed in more detail later herein. The standardized prefix/netmask entries are then merged into a single unified table, step 220, to aid in clustering together clients in the network. Typically, the unified routing table will be created periodically to incorporate possibly updated information from the routing tables in the network. The unified routing table may be created or generated at any interval such as every two hours, once a month or ten times a year as desired.

Referring to FIG. 5, a network prefix/netmask entry may be in one of three formats as shown in a tabular form. A first exemplary format 230 is configured generally as

x1.x2.x3.x4/k1.k2.k3.k4 and is used in exemplary routing tables MAE-EAST, MAE-WEST, PACBELL AND PAIX, where x1.x2.x3.x4/k1.k2.k3.k4 are network prefix and netmask respectively with zeroes dropped at the end or tail. One such example is 193.1/255.255, which corresponds to 193.1.0.0/255.255.0.0, where 193.1.0.0 and 255.255.0.0 are network prefix and netmask, respectively.

Referring again to FIG. 5, another exemplary network prefix/netmask entry format may also be configured as x1.x2.x3.x4/l as in routing tables at ARIN, AT&T, CANET, NLANR AND VBNS, where x1.x2.x3.x4 is the prefix and l is the netmask length. For example, 128.148.0.0/16 stands for 128.148.0.0/255.255.0.0, where 128.148.0.0 and 255.255.0.0 are network prefix and netmask. Additionally, another exemplary prefix/netmask entry format may be configured as x1.x2.x3.0 which can also be found in CANET, and is an abbreviated representation of x1.x2.x3.0/k1.k2.k3.0. For example, 130.15.0.0 is an abbreviated representation of 130.15.0.0/255.255.0.0. Of course, other formats may exist and may be utilized herein provided the different formats are standardized to a singular format to aid in clustering clients in the network.

In the present invention, the network prefix/netmask entries are unified into a single standardized format as previously discussed herein and shown as step 210 in FIG. 4. Any one of the formats as discussed above or other network prefix/netmask formats that may exist will preferably be converted into this single standardized format. In one exemplary embodiment, the format x1.x2.x3.x4/k1.k2.k3.k4 is chosen as the standardized format. For instance, any network prefix/netmask entries in the format of x1.x2.x3.x4/l and/or the format x1.x2.x3.0 will be converted into the format x1.x2.x3.x4/k1.k2.k3.k4 such that prefix/netmask entries 128.148.0.0/16, 130.15.0.0 and 192.75.72.0 will be converted respectively into 128.148/255.255, 130.15/255.255 and 192.75.72/255.255.255. These converted prefix/netmask entries are then tabulated into a single unified table with prefix/netmask entries existing in all the same format. This table may be in a simple tabular form with the multiple prefix/netmask entries listed in a grid array form.

Referring now to FIG. 6, an exemplary method for clustering clients using the unified prefix/netmask table is shown. A number of client IP addresses are first extracted from a network server log, step 600. The server log may be any generally available server log, such as a World Wide Web server log which collects client request information to the Web server. The extracted client IP addresses are matched with the entries in the unified prefix/netmask table to determine a common network address prefix, step 610. Such matching may be performed by conducting a longest prefix matching on each client IP address with each of the entries in the unified prefix/netmask table. Once prefix matching has been performed, the client IP addresses are clustered into respective client clusters, step 620. In each respective client cluster, each of the clients within a client cluster will share a common prefix, or more specifically, a common longest prefix matching from the unified prefix/netmask table. A threshold for prefix matching may be set such that a client IP address has to have at least a certain number of matching digits in the client IP address prefix with any one of the prefix/netmask entries in the unified prefix/netmask table before a match is declared. For example, in one embodiment, a client IP address may have to prefix match at least four digits of any one of the prefix/netmask entries in the unified prefix/netmask table to be considered a match.

Once clients have been clustered together in client clusters as discussed above, servers, such as proxy servers, cache servers, content distribution servers and/or mirror servers may be placed or assigned to these client clusters. Preferably, in the case of proxy servers, the proxy servers being assigned to these client clusters will be functioning as cache servers and thereby their optimum assignment or placement will depend greatly on the proper clustering of these clients. In the present invention, the servers may be assigned to these client clusters based on one or more factors or metrics such as the number of clients, the number of requests issued, the URLs accessed, the number of bytes fetched from a server and other related factors. In one embodiment, more than one server, such as a proxy server, cache server, content distribution server and/or mirror server may be assigned to the same client cluster or clusters such that the servers will together form a server cluster, as discussed earlier herein. The servers within a server cluster will act in concert with one another to service their respective client cluster(s).

In one example, proxy servers, cache servers, content distribution servers and/or mirror servers may be assigned to a client cluster based simply on the number of clients in the respective client cluster. For example, a client number threshold may be set such that a server may be assigned for every instance of the client number threshold reached. A threshold may be set at any number such as 100, 500 or a 1000 clients. In an exemplary embodiment, where the client number threshold is set at 500, a client cluster containing 4000 clients will require and be assigned at least eight (8) servers, whether they may be proxy servers, cache servers, content distribution servers and/or mirror servers. These eight servers together will form a server cluster which will be placed in front of the client cluster in the network to service the clients requests to and from the Internet.

In another example, proxy servers, cache servers and/or content distribution servers may be assigned to one or more client clusters based on the number of requests, such as HTTP request, which are issued by the clients within each respective client cluster. For example, a request threshold may be set such that a server may be assigned for client clusters which issue a certain number of requests which equals or exceeds the threshold. A threshold may be set at any number depending on the anticipated capacity of the server to be assigned to the client cluster.

In another exemplary embodiment, at least one server, such as a proxy server, cache server, content distribution server and/or mirror server, may be placed in front of each client cluster. The servers may be further grouped into server clusters based on their respective Autonomous System (AS) numbers and respective geographical locations. In this example, all servers belonging to the same AS and located geographically nearby will be grouped together to form a server cluster. In addition, in some instances, undesirable network spiders and conflicting proxy servers are eliminated from a client cluster before placing a server, such as a proxy server, cache server, content distribution server and/or mirror server to server that client cluster.

Referring to FIG. 7, an embodiment for clustering, or more specifically, for on-line network aware clustering is shown. In this embodiment, a plurality of client IP addresses are extracted, step 700. Longest prefix matching is then performed on each client IP address according to a data structure or radix-encoded trie, step 710. Once long prefix matching is

performed on each client IP address, all the client IP address that have the same longest matched prefix are classified or grouped into one client cluster, step 720. In this embodiment, to cluster a set of IP addresses in an on-line network aware manner, a recursively structured table or data structure, call a radix-encoded trie or retrie is used.

5

As used herein, the radix-encoded trie or retrie is a basically a table indexed on some high-order bits of a given key. Each entry points to another table, indexed by some of the following bits, and so on. For background purposes, an IP address is, e.g., in IPv4, a 32-bit integer, and an IP prefix, p , is an IP address associated with a length, $l(p) \in [0, 32]$. Prefix p matches address A if $A \& ((2^{l(p)} - 1) \ll (32 - l(p))) = p$, where $\&$ is bit-wise AND and \ll is left shift. Thus, given a collection of K -bit keys, consider a top-level retrie, R , indexed on the k most significant bits of a key. R is a table of size 2^k . Let \gg indicate right shift. Given key x , element $R[x \gg (K - k)]$ points to a second-level retrie, R' , indexed on, say, the next l bits. The element of R' corresponding to x is $R'[(x \gg (K - (k + l))) \& (2^l - 1)]$; and so on. That is, each retrie has a shift value ($K - k$ in the top level, $K - (k + l)$ in the second level in this example) and a mask value ($2^k - 1$ in the top level, $2^l - 1$ in the second level); the top-level mask is superfluous. The shift and corresponding mask values among the lower-level retries need not be identical.

10

15

20

As used herein, the retrie may be completely described by a structure containing pointers to the top-level table and shift and mask values. Standard memory alignment of pointers may be used to search for key x in retrie r as follows.

```
while(! ((r=r->table[(x>>r->shift)&r->mask] )&1))
```

25

When the loop exits, the upper 31 bits of r point to the data record for x . To build a retrie for a set S of IP prefixes, a binary search tree T describing the induced address ranges is first built. Consider prefix $p = b_1 \dots b_{32}$, where the b_i 's are the bits of p in msb-to-lsb order, and define the addresses $low(p) = b_1 \dots b_{l(p)} 0 \dots 0$ and $high(p) = b_{l(p)} \dots b_{32} 1 \dots 1$ where $0 \dots 0$ corresponds to $32 - l(p)$ and $1 \dots 1$ corresponds to $32 - l(p)$. Prefix P covers addresses in the range $[low(p), high(p)]$.

30

Initially, T contains one key, 0, describing the range $[0, 2^{32} - 1]$. We insert each prefix p in S , in non-decreasing order by length, into T as follows. Find the predecessor, x , of p in T . By induction, the properties of prefixes and the ordering of prefixes by length imply that the range of p is contained in the range $[x, y)$, associated by invariant with x , where y is the successor of x in T . Insert $low(p)$ and $high(p) + 1$ into T , associating range $[low(p), high(p)]$ with $low(p)$. The remainder of the original range, $[x, y)$, associated with x is split into ranges $[x, low(p))$, associated with x , and $[high(p) + 1, y)$, associated with $high(p) + 1$. After construction, an LPM query on an address x could be performed by a predecessor query of x in T .

Consider a retrie to be built on some range $R = [x, y)$ (initially $[0, \infty)$) of addresses, and assume a global threshold parameter t . The elements of T within R correspond to the matching prefixes within R . The shift value s and mask value m are in one-to-one correspondence. Let L be the length of the longest prefix within R . Ideally, s is set so that $32 - s = L$, i.e., so that the retrie fully qualifies each prefix within R . If the corresponding m exceeds $2^t - 1$, however--if the table would be too big--then m is set to $2^t - 1$ and s is set accordingly, resulting in lower level retriees. The table is then populated using the elements of T to map IP addresses to corresponding LPMs, recursively constructing lower level retriees as necessary. Another global parameter k determines that the top-level mask is always $2^k - 1$.

Referring to FIG. 8, given prefixes 10.24.16.0/20 (A), 10.24.17.0/24 (B), 10.24.32.0/20 (C), 128.0.0.0/4 (E), and 0.0.0.0/0 (D). The top portion of FIG. 8 shows partition of 32-bit address space induced by the prefixes. For example, B is an extension of A , which partitions A 's range, $[10.24.16.0, 10.24.31.255]$, into subranges $[10.24.16.0, 10.24.16.255]$, $[10.24.17.0, 10.24.17.255]$, and $[10.24.18.0, 10.24.31.255]$, associated with A , B , and C , resp. The bottom portion of FIG. 8 shows the radix-encoded trie of the present invention. First level has 18-bit mask, and second has 6-bit mask to qualify prefixes A , B , and C fully. Masks and table indices are in decimal. For example, to search for x 10.24.19.45, we index $(x \gg 14) \& 262143 = 10336$ in the top-level retrie, leading to the second level, which we index by $(x \gg 8) \& 63 = 19$, yielding LPM A .

Referring again to FIG. 8, the <shift,mask> values are combined into a single value in the predecessor table which cuts the number of memory accesses in half. An exemplary code implementation of the retrie is further provided in FIG. 9a. In this embodiment, the elements in the last retrie table level contain only the next hop index which decreases the retrie table size, as demonstrated by the code, `lpmatch()`, for (X1)+(X2). Referring now to FIG. 9b, an embodiment is shown where the number of retrie levels is fixed, e.g. FIG 9b provides exemplary code, `pmatch2()`, for a 2 level retrie.

In the present invention, clustering may be performed in both software and hardware implementations which implements the teachings and methods outlined herein. For example, the longest prefix matching process using the radix encoded trie may be implemented within either software or hardware implementations for IP routers to perform network aware clustering. For example, longest prefix matching using the radix encoded trie may be used to assist a router in determining the next network point to which a packet should be forwarded toward its destination. The router may create or maintain a table of the available routes and their conditions and use this information along with distance and cost algorithms, as well as clustering information to determine the best route for a given packet. It will be apparent to those skilled in the art that many changes and substitutions can be made to the system and method described herein without departing from the spirit and scope of the invention as defined by the appended claims.

We claim:

1. An on-line method of classifying IP addresses into related clusters within a distributed information network, the method comprising the steps of:
 - receiving a plurality of IP addresses;
 - processing the plurality of IP addresses according to a radix encoded trie classification process; and
 - classifying the plurality of IP addresses into related clusters.
2. The method of claim 1, wherein the plurality of client IP addresses are received from one or more network routers.
3. The method of claim 1, wherein the IP addresses are network client IP addresses.
4. The method of claim 1, wherein the distributed information network is the World Wide Web.
5. A method for on-line grouping of a plurality of Web client IP addresses into related client clusters, the method comprising the steps of:
 - extracting client IP addresses from a collection of IP addresses;
 - performing longest prefix matching on each client IP address; and
 - classifying all of the client IP addresses that have the same longest matched prefix into a client cluster based on a radix encoded trie matching process.
6. The method of claim 1, wherein the client IP addresses are extracted in real time from a network server.
7. The method of claim 1, wherein the distributed information network is the Internet.

1 8. A method for determining the relationships between a plurality of client IP addresses, the
2 method comprising:

3 processing the plurality of client IP addresses according to a radix encoding trie (retrie);

4 and

5 grouping all of the client IP addresses which share the common longest prefix matching
6 into at least one client IP grouping.

7
1 9. The method of claim 8, further comprising:

2 receiving the plurality of client IP addresses from one or more network servers.

3
10. The method of claim 8, wherein the network servers are at least one of proxy servers,
cache servers, content distribution servers and mirror servers.

11. The method of claim 8, wherein the at least one IP address is a client IP address.

12. The method of claim 8, wherein the at least one IP address is a server IP address, wherein
the cluster is a server cluster.

13. The method of claim 8, wherein the retrie includes shift, mask values which are
combined into a single value in a predecessor table.

14. The method of claim 8, wherein the elements in a last retrie table level contain only a
next hop index so as to decrease the retrie table size.

15. The method of claim 8, wherein the retrie includes a fixed number of retrie levels.

16. The method of claim 8, wherein the number of retrie levels is fixed at two levels.

1 17. A computer-readable medium containing executable instructions which cause a computer
 2 to perform the steps of:

3 extracting at least one IP address;
 4 performing longest prefix matching on the at least one IP address; and
 5 classifying the at least one IP address into a cluster, wherein the longest prefix matching
 6 is performed according to a radix-encoded trie.

1 18. The computer-readable medium of claim 17, wherein the at least one IP address is a
 2 client IP address.

3 19. The computer-readable medium of claim 17, wherein the at least one IP address is a
 4 server IP address, wherein the cluster is a server cluster.

5 20. The computer-readable medium of claim 17, wherein the radix encoded trie is described
 6 by the equation:

7
$$\text{while}(! ((r \rightarrow \text{tablel}(x \gg r \rightarrow \text{shift}) \& r \rightarrow \text{mask}) \& 1))$$

8 where x is the search key and r is the radix encode trie.

ABSTRACT

A method for clustering together network IP addresses is disclosed. A number of IP addresses are received and processed to determine which IP addresses share a longest prefix matching. The longest prefix matching process is performed according to radix encoded trie which facilitates on-line clustering of the IP addresses. Client and/or server IP addresses may be clustered in accordance with the teachings herein.

11/11/2000 11:11:11 AM

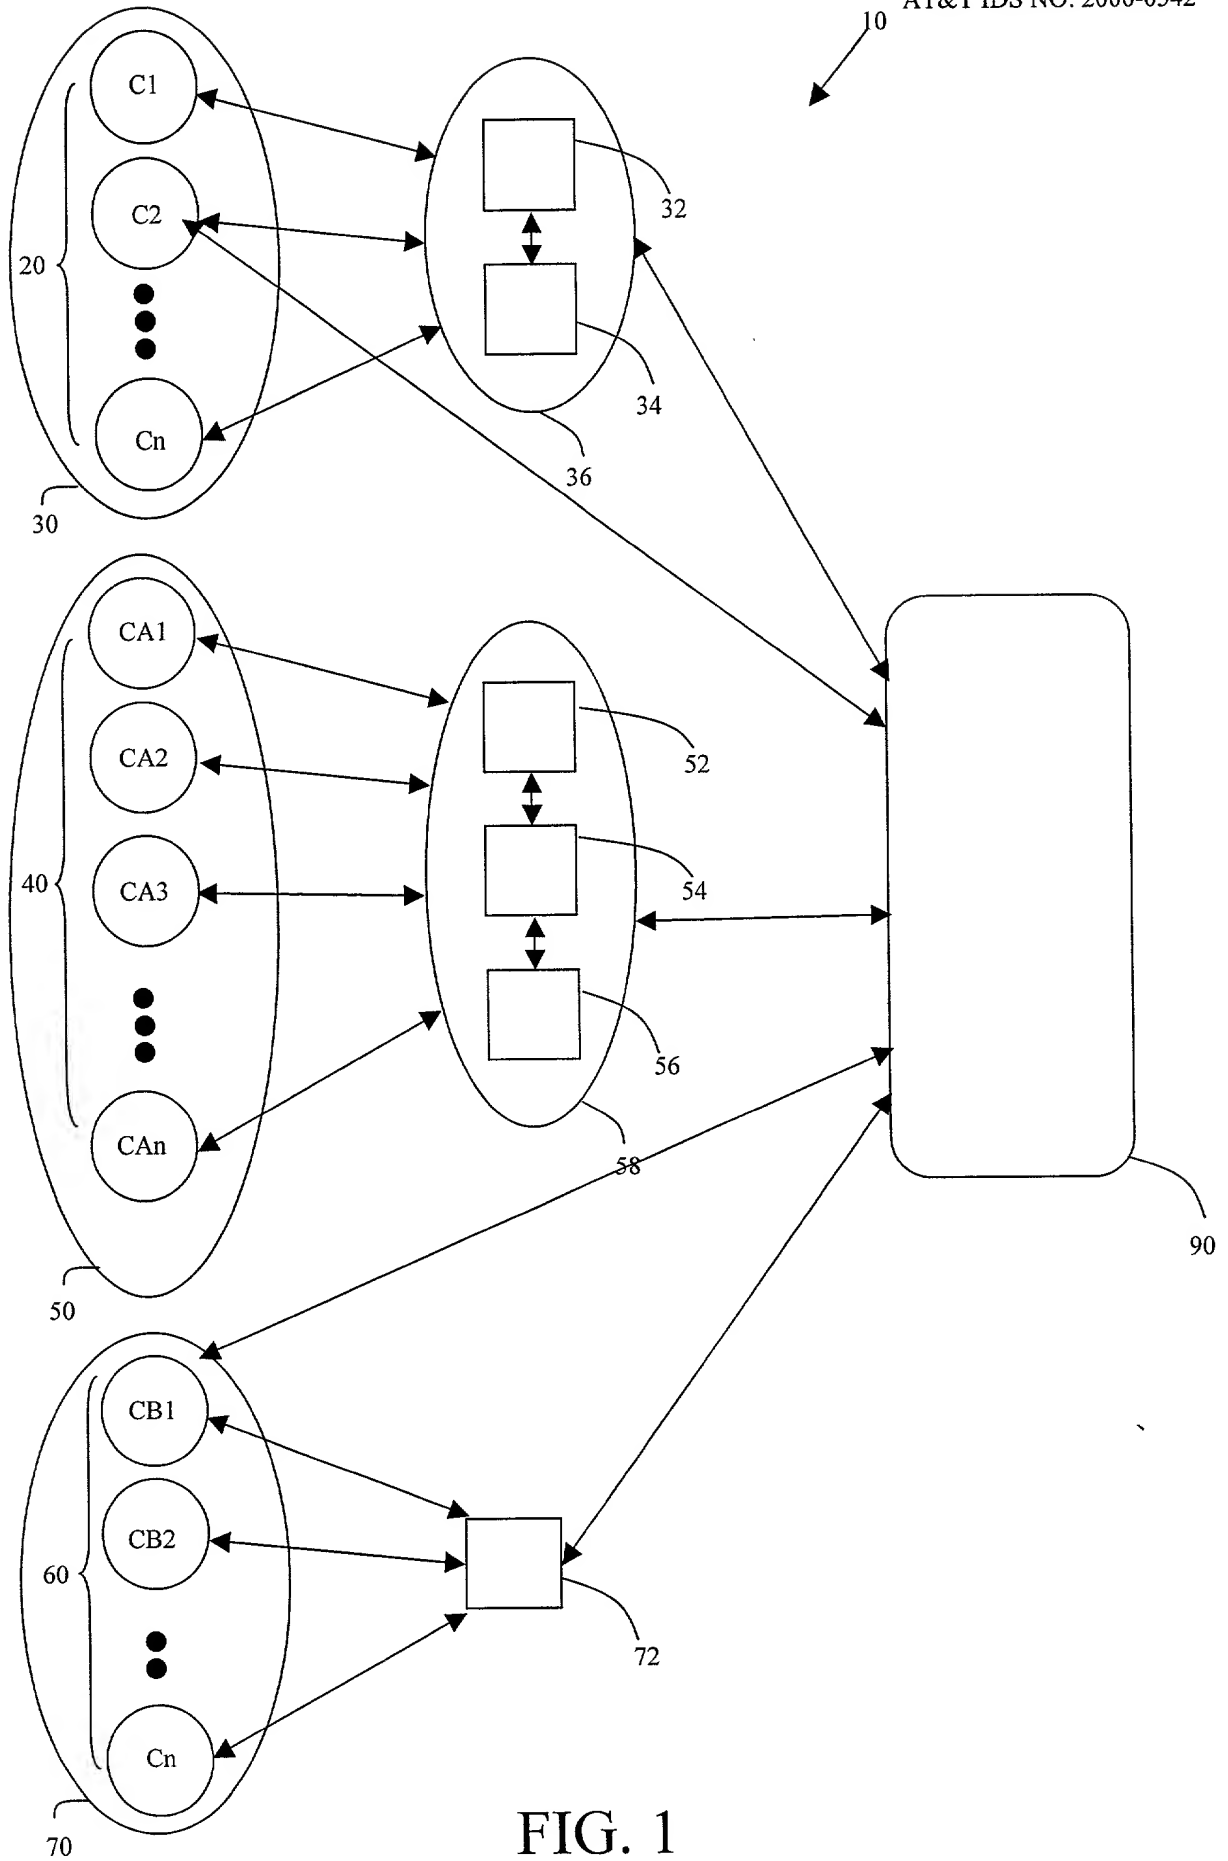


FIG. 1

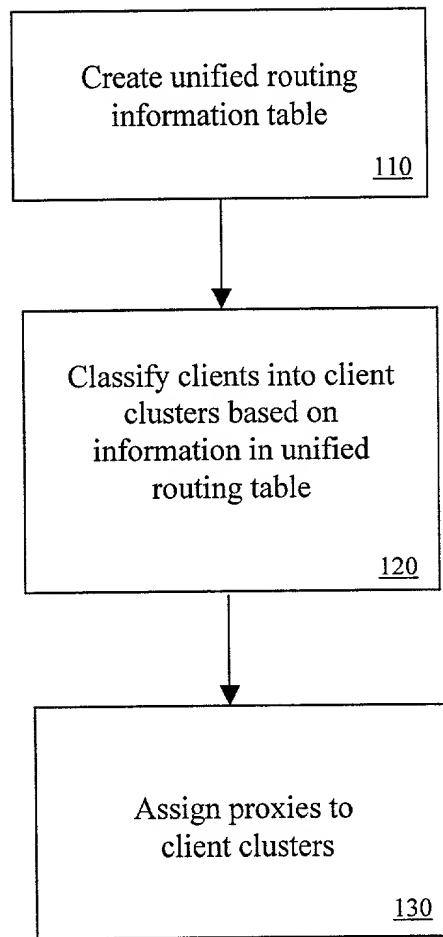


FIG. 2

160
↙

Routes		AS path
134.87.2.0/24	BCnet	6509 271
134.117.0.0	Carleton University	6509 10786
137.82.0.0	University of British Columbia	6509 271
137.122.0.0	University of Ottawa	6509 10786

170 180 190

FIG. 3

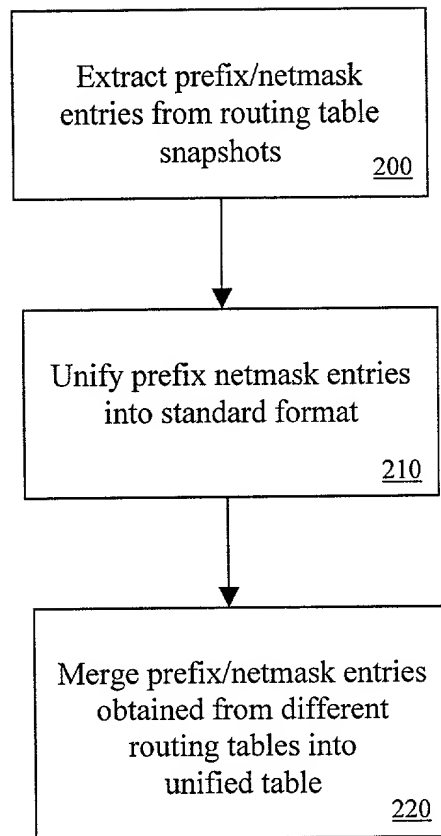


FIG. 4

	230	240	250
Formats	x1.x2.x3.x4/k.1k.2k.3k.4	x1.x2.x3.x4/l	x1.x2.x3.0
Routing Tables	MAE-EAST MAE-WEST PACBELL PAIX	ARIN AT&T CANET NLANR VBNS	CANET
Examples	193.1/255.255 193.0.128/255.255.192	128.148.0.0/16	130.15.0.0
Unification	193.1/255.255 193.0.128/255.255.192	128.148.0.0/255.255	130.15.0.0/255.255 192.75.72/255.255.255

FIG. 5

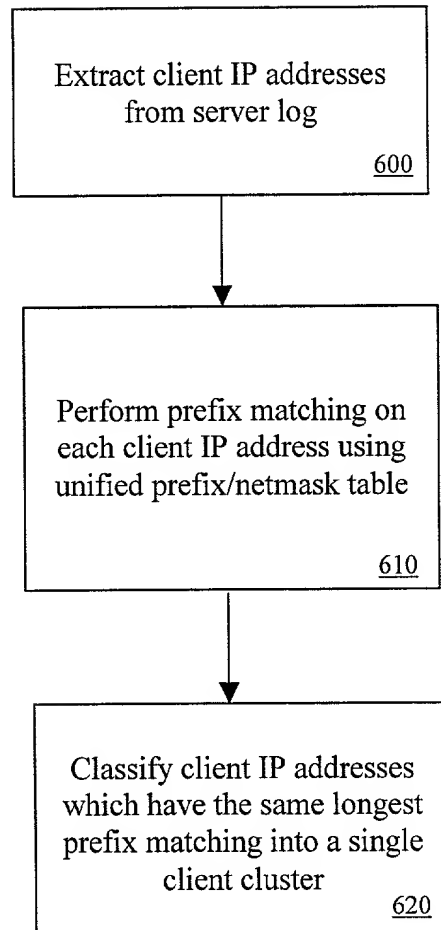


FIG. 6

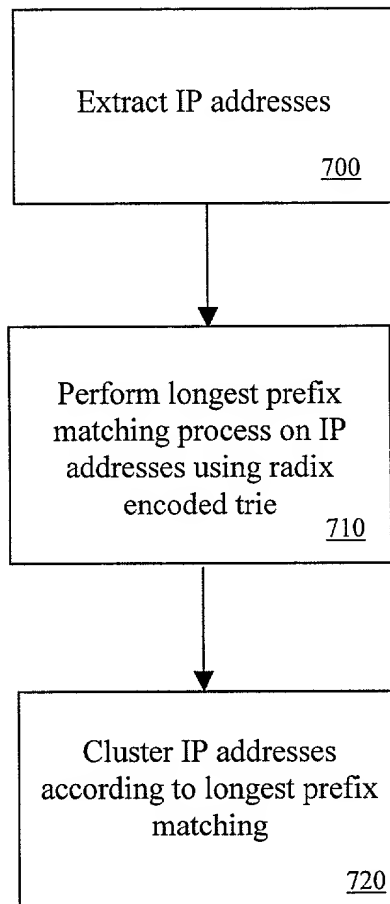


FIG. 7

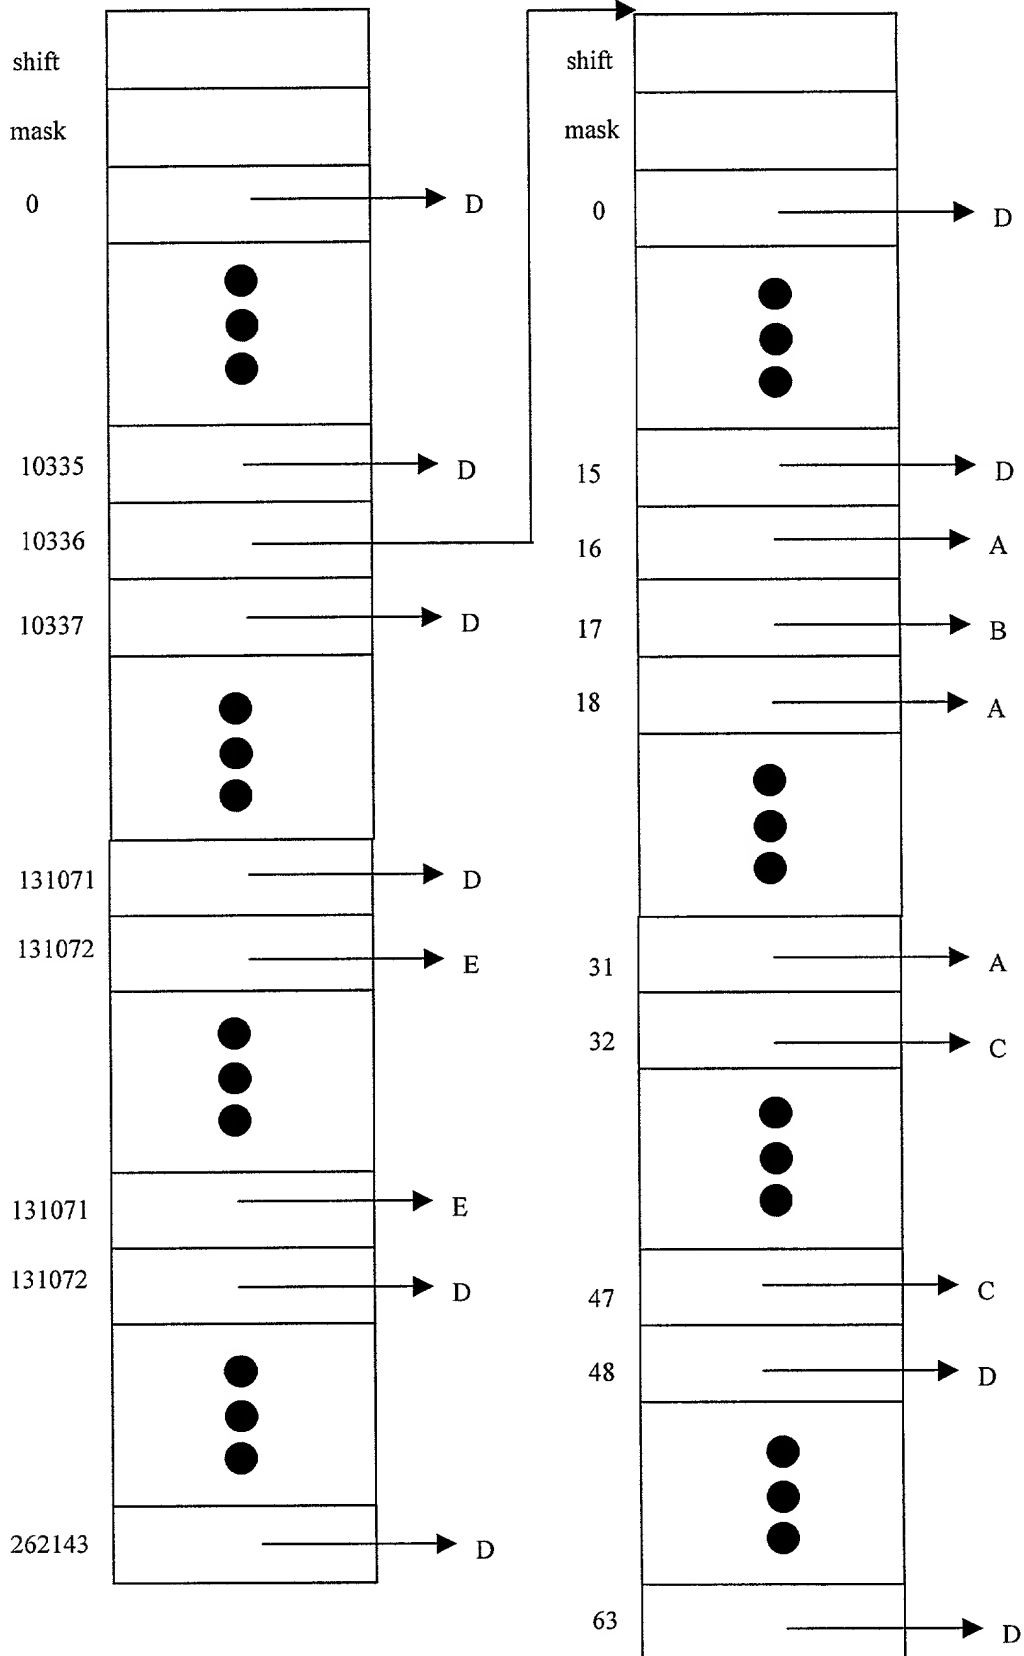



FIG. 8

matching code for the <S,R,H> values generated by the first part of the algorithm

```

/*
5  * multi-level retrie longest prefix match
  *
  * input arguments:
  *
  *   S      top level shift
10  *   R      retrie internal nodes
  *   H      retrie leaf nodes (next hop index)
  *   addr   IP address to match
  *
  * return:
15  *
  *   0      no match
  *  >0     next hop index
  */

20 int
lpmatch(uint8 S, uint32* R, uint8* H, uint32 addr)
{
    uint32      b;
    uint32      x;

25    x = R[addr >> S];
    while (b = x >> 27)
    {
        b = (x & ((1<<26)-1)) + ((addr>>(S-=b)) & (1<<b)-1));
        if (x & (1<<26))
        {
            x = H[b];
            break;
30        }
        x = R[b];
35    }
    return x;
}

```

FIG. 9a

```

/*
 * 2-level retrieve longest prefix match
 *
 * input arguments:
5  *
 *   S      top level shift
 *   R      retrieve internal nodes
 *   H      retrieve leaf nodes (next hop index)
 *   addr   IP address to match
10  *
 * return:
 *
 *   0      no match
 *   >0     next hop index
15 */

int
lpmatch2(uint8 S, uint32* R, uint8* H, uint32 addr)
{
    uint32      x;

    x = R[addr >> S];
    return H[(x & ((1<<26)-1)) + ((addr & ((1<<S)-1)) >> (S - (x>>27)))];
}

```

FIG. 9b

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION	Attorney Docket Number	2000 542
	First Named Inventor	Adam Louis Buchsbaum
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration submitted after Initial Filing	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method For Fast Network-Aware Clustering

(Title of Invention)

the specification of which

☐ is attached hereto

OR

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of an application on which priority is claimed

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) below.

Application Number(s)	Filing Date(MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto
60/215,302	06/30/2000	
60/234,511	09/22/2000	

SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231

Attorney Docket Number: 2000-0542

DECLARATION - Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
09/603,154	07/23/2000	

☐ Additional U.S. or PCT International application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

Place Customer Number Bar Code Label here

OR

☒ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
CONOVER, Michele L.	34962	DELACRUZ, Cedric G	36498
DWORETSKY, Samuel H.	27873	STEINMETZ, Alfred G.	22971
ISACSON, Thomas M.	44166	LEE, Benjamin S.	42787
LEVY, Robert B.	28234	MCGAHAN, Susan E.	35948
MONKA, Gary H.	35290	NAVON, Jeffrey M	32711

☒ I also appoint the following additional registered practitioner(s) named on the Registered Practitioner Information (Supplemental Sheet) (PTO/SB/02C modified by AT&T Corp.) attached hereto with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith.

Direct all Correspondence to:

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME	Samuel H. Dworesky				
ADDRESS	AT&T CORP. P.O. Box 4110				
CITY	Middletown	STATE	New Jersey	ZIP CODE	07748-4110
COUNTRY	United States of America			FAX	732-368-6932

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Name of Sole or First Inventor ☐ A petition has been filed for this unsigned inventor

Name	Adam Louis Buchsbaum		
Signature		Date	
Citizenship	United States		
Address (line 1)	6 Glen Avenue		
Address (line 2)	Cranford		
Address (line 3)	Union County		
Address (line 4)	New Jersey		
Address (line 5)	USA		
Zip Code	07016		

☒ Additional Inventors are being named on the 1 separately numbered sheets attached hereto

SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

DECLARATION**ADDITIONAL INVENTOR(S)****Supplemental Sheet****Page 1 of 1****Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor**Name** Glenn Stephen Fowler**Signature****Date****Citizenship** United States**Address (line 1)** 2322 Lyde Place**Address (line 2)** Scotch Plains**Address (line 3)** Union County**Address (line 4)** New Jersey**Address (line 5)** USA**Zip Code** 07076**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor**Name** Balachander Krishnamurthy**Signature****Date****Citizenship** United States**Address (line 1)** 60 East 8th Street, Apt. 5C**Address (line 2)** New York**Address (line 3)** New York County**Address (line 4)** New York**Address (line 5)** USA**Zip Code** 10003**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor**Name** Jia Wang**Signature****Date****Citizenship** United States**Address (line 1)** 30 Lake Street, Apt. 4A**Address (line 2)** White Plains**Address (line 3)** Westchester County**Address (line 4)** New York**Address (line 5)** USA**Zip Code** 10603**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor**Name****Signature****Date****Citizenship****Address (line 1)****Address (line 2)****Address (line 3)****Address (line 4)****Address (line 5)****Zip Code**

Attorney Docket Number: 2000-0542

DECLARATION**Registered Practitioner
Information
(Supplemental Sheet)**

Name	Registration Number	Name	Registration Number
RESTAINO, Thomas A. SZWERC, Christine	33444 43177	GARG, Rohini K.	45272

SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231